



PUMP PERFORMANCE

H77 SRC SERIES
C FRAME


FLOW RANGE: 60 - 118

OPERATE WITHIN DESIGNATED
AREA ONLY

$$HP = \left(\frac{[GPM \times (PSI \times 2.31)]}{3960} \right) \text{ EFFICIENCY}$$

IMPORTANT: 10 PSI MINIMUM INLET PRESSURE REQUIRED. FOR GRAVITY FEED APPLICATIONS CONTACT FACTORY.
FEED WATER NOT TO EXCEED 85 °F. FOR HIGHER WATER TEMPERATURES CONTACT FACTORY.
PERFORMANCE @ 70 °F WATER TEMPERATURE, 1.0 SP. GRAVITY.

85 GPM #85
3600 RPM 460V 3 Ø
60HZ

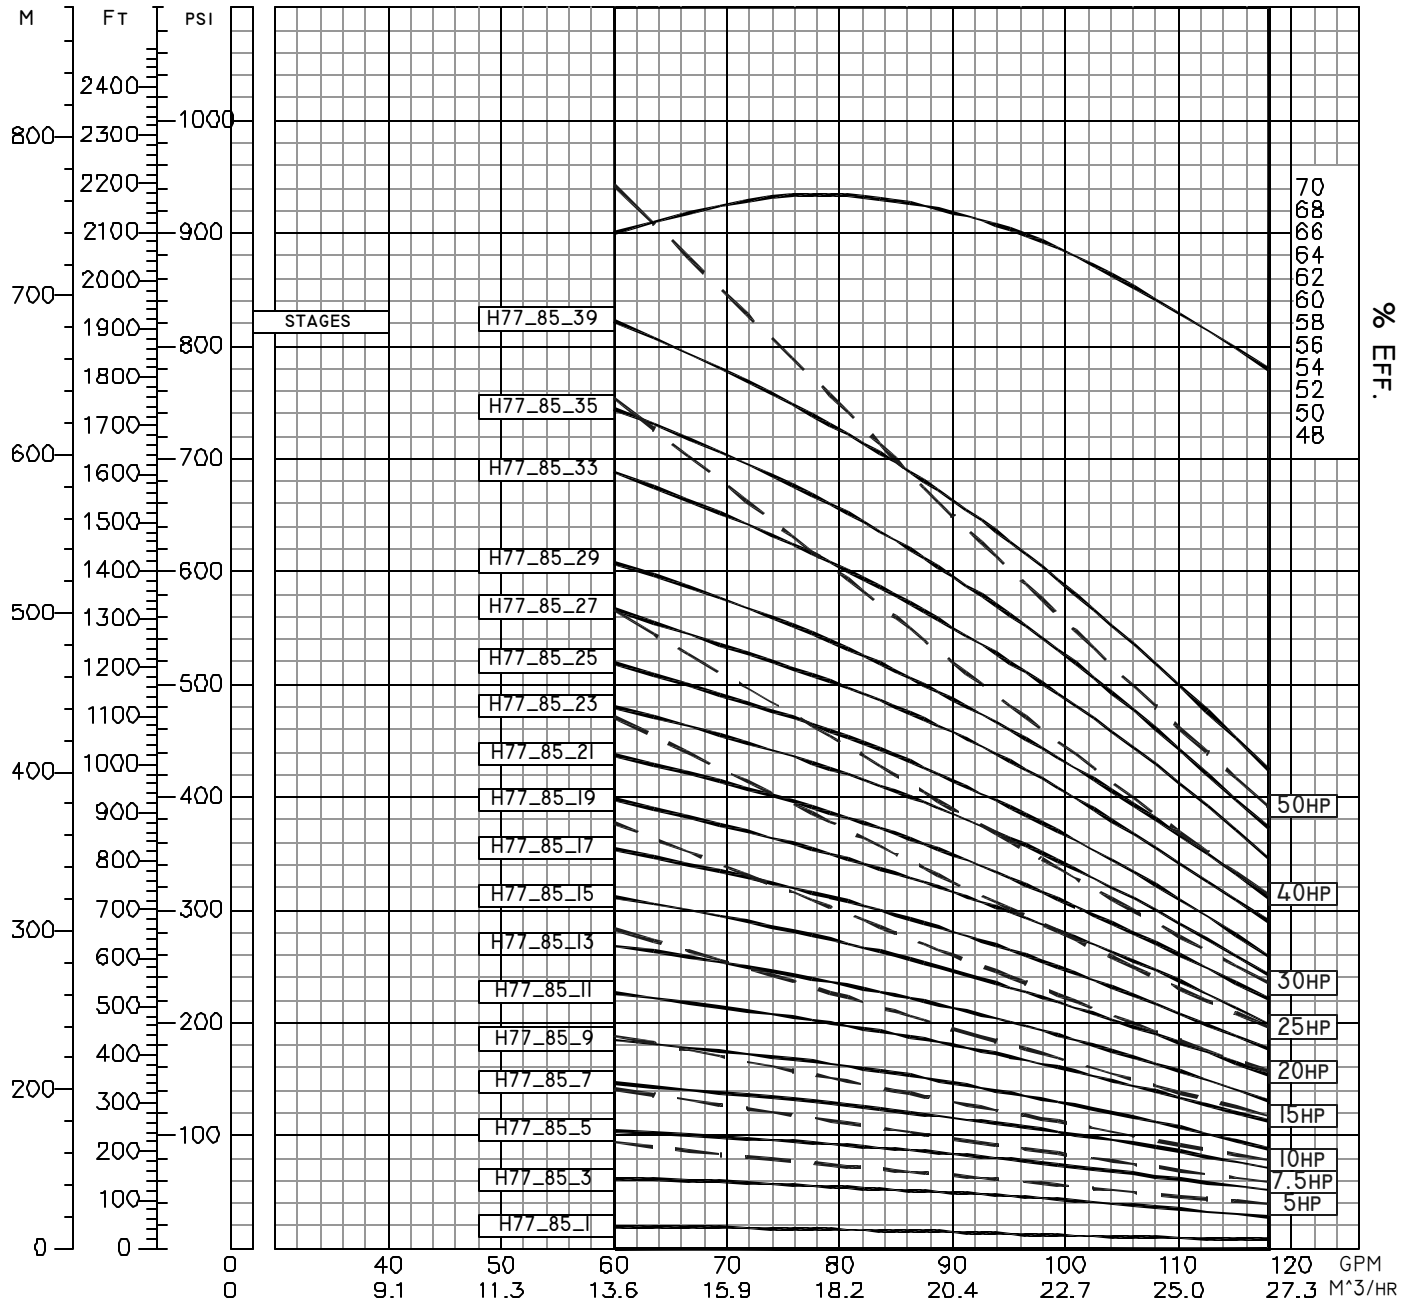

PERFORMANCE IS BASED ON 3600 (NOMINAL) RPM, 60 HZ MOTOR. THESE PUMP CURVES AND ANY INDIVIDUAL CURVES, WHICH ARE AVAILABLE UPON REQUEST, ARE TYPICAL ONLY AND ARE NOT GUARANTEED AS MINIMUM PERFORMANCE. IF EXACT FLOW AND PRESSURE ARE REQUIRED, A CERTIFIED CURVE MAY BE ORDERED AT ADDITIONAL COST IF ACCOMPANIED BY AN ORDER AND ONLY AFTER PUMP HAS BEEN TESTED.

MANUFACTURED BY : T&T PUMP CO. INC.
2/9/99 RT 8 Box 343
FAIRMONT, WV 26554



SPECIFICATIONS SUBJECT TO
CHANGE WITHOUT NOTICE